


N-Channel Enhancement Mode MOSFET

Features

- Fast switching speed
- Reliable and Rugged
- ROHS Compliant
- 100% UIS and Rg Tested

Pin Description

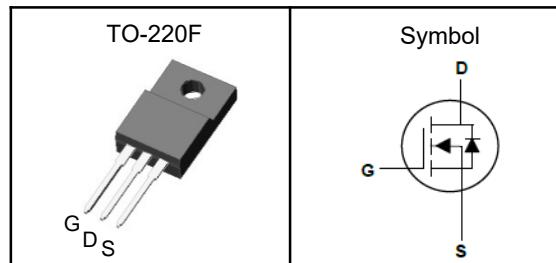

Applications

- Power Management in Desktop Computer
- DC/DC Converters

V_{DSS}	650	V
$R_{DS(ON)-Typ}$	2.1	Ω
I_D	4	A

Absolute Maximum Ratings ($T_J=25^\circ\text{C}$, Unless Otherwise Noted)

Symbol	Parameter	N-Channel	Unit
V_{DSS}	Drain-Source Voltage	650	V
V_{GSS}	Gate-Source Voltage	± 30	V
T_J	Maximum Junction Temperature	-55 to 150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
E_{AS}	Single Pulse Avalanche Energy ^③	240	mJ
$I_{DM}^{①}$	Pulse Drain Current Tested	16	A
I_D	Continuous Drain Current	$T_c=25^\circ\text{C}$	A
P_D	Maximum Power Dissipation	$T_c=25^\circ\text{C}$	W

Thermal Characteristics

Symbol	Parameter	Rating	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ₁ (Max)	62.5	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance Junction-Case ₁	3.47	$^\circ\text{C}/\text{W}$

Note ① : Max. current is limited by bonding wire.

Note ② : UIS tested and pulse width are limited by maximum junction temperature 150°C .

Note ③ : Surface Mounted on 1in² FR-4 board with 1oz.

N-Channel Enhancement Mode MOSFET

Electrical Characteristics ($T_J=25^\circ\text{C}$, Unless Otherwise Noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Static Electrical Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	650	---	---	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}}=650\text{V}$, $V_{\text{GS}}=0\text{V}$	---	---	1	μA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$, $I_D=250\mu\text{A}$	2	---	4	V
I_{GSS}	Gate Leakage Current	$V_{\text{GS}}=\pm 30\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
$R_{\text{DS(ON)}}$	Drain-Source On-state Resistance	$V_{\text{GS}}=10\text{V}$, $I_D=2\text{A}$	---	2.1	2.4	Ω
Dynamic Characteristics^⑤						
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=25\text{V}$, Freq.=1MHz	---	490	---	pF
C_{oss}	Output Capacitance		---	45	---	
C_{rss}	Reverse Transfer Capacitance		---	6	---	
$T_{\text{d(on)}}$	Turn-on Delay Time	$V_{\text{DD}}=325\text{V}$, $R_G=25\Omega$, $I_D=4\text{A}$	---	20	---	nS
T_r	Turn-on Rise Time		---	55	---	
$T_{\text{d(off)}}$	Turn-off Delay Time		---	70	---	
T_f	Turn-off Fall Time		---	50	---	
Q_g	Total Gate Charge	$V_{\text{DD}}=400\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_D=4\text{A}$	---	10	---	nC
Q_{gs}	Gate-Source Charge		---	2	---	
Q_{gd}	Gate-Drain Charge		---	5	---	
Source-Drain Characteristics ($T_J=25^\circ\text{C}$)						
V_{SD}	Diode Forward Voltage ₂	$V_{\text{GS}}=0\text{V}$, $I_S=4\text{A}$, $T_J=25^\circ\text{C}$	---	---	1.4	V
t_{rr}	Reverse Recovery Time	$V_R=400\text{V}$, $I_F=4\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$, $T_J=25^\circ\text{C}$	---	390	---	nS
Q_{rr}	Reverse Recovery Charge		---	2.2	---	nC

Note ④ : Pulse test (pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$).

Note ⑤ : Guaranteed by design, not subject to production testing.

N-Channel Enhancement Mode MOSFET

Typical Characteristics

Figure 1. Output Characteristics

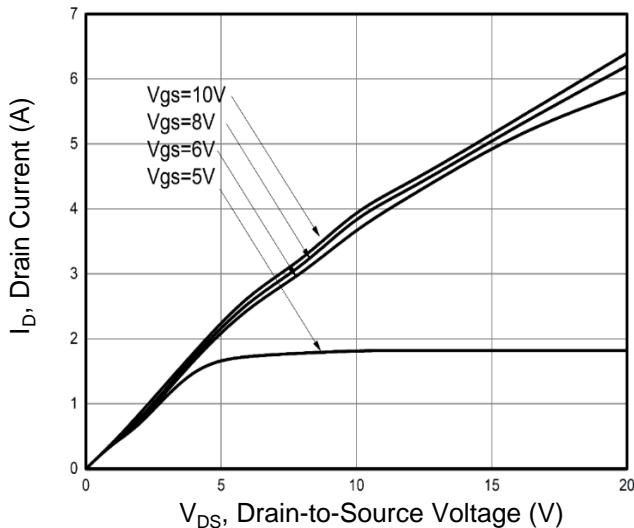


Figure 2. Transfer Characteristics

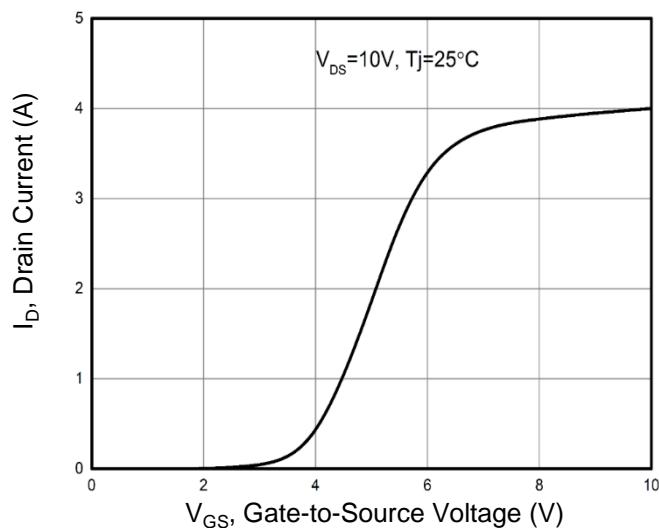


Figure 3. Drain Current vs. Temperature

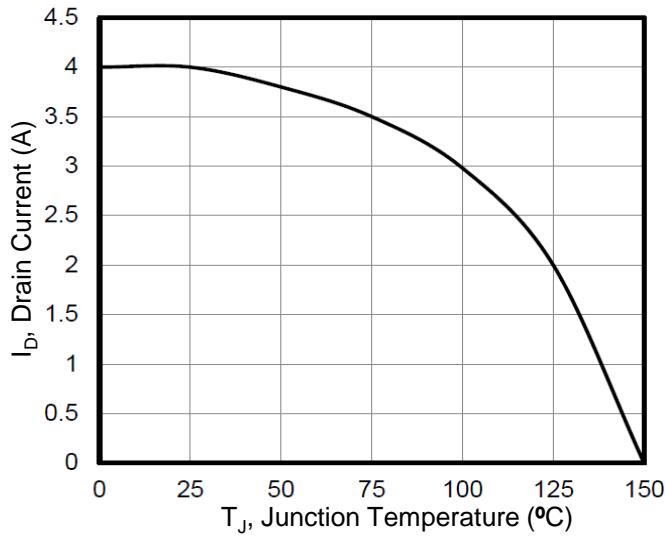


Figure 4. Capacitance

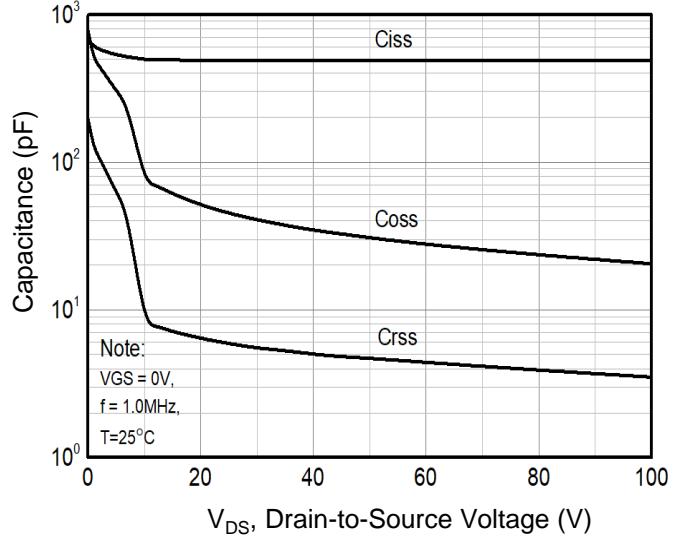


Figure 5. Gate Charge


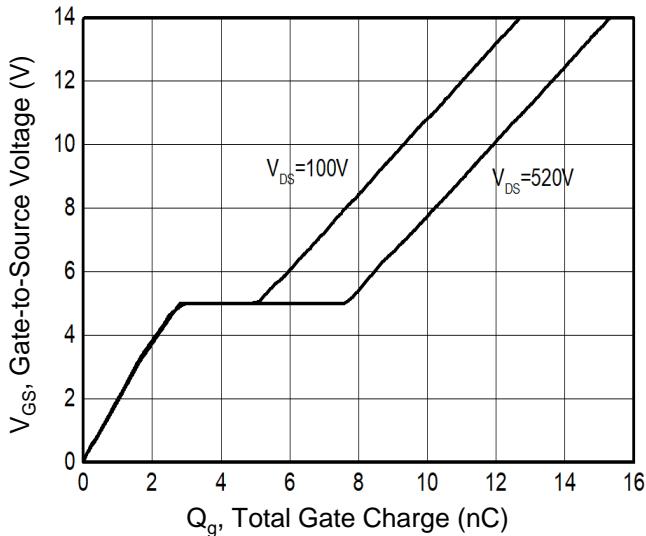


Figure 6. Body Diode Forward Voltage

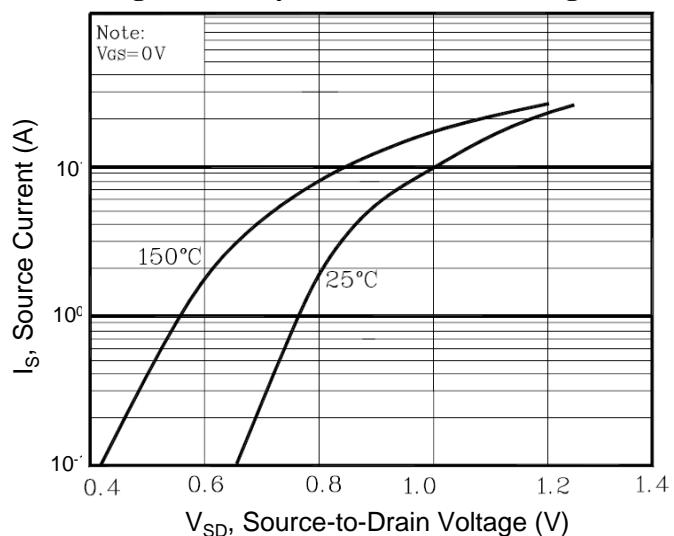

N-Channel Enhancement Mode MOSFET

Figure 7. On-Resistance vs. Temperature



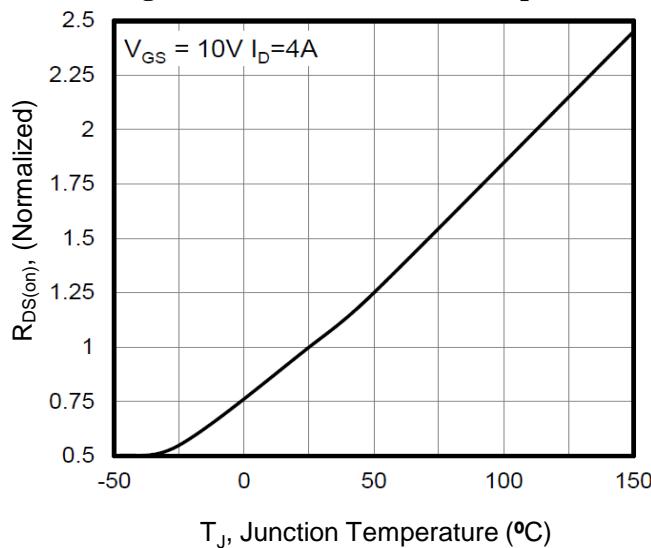


Figure 8. BV_{DSS} vs. Temperature



**Figure 9. Transient Thermal Impedance
(TO-220F)**

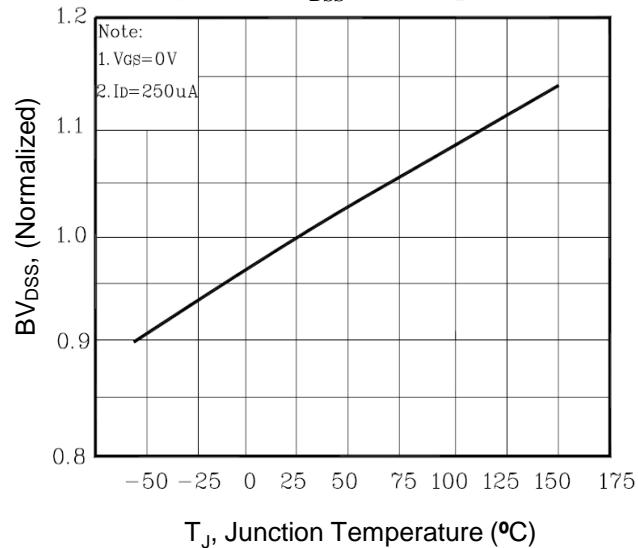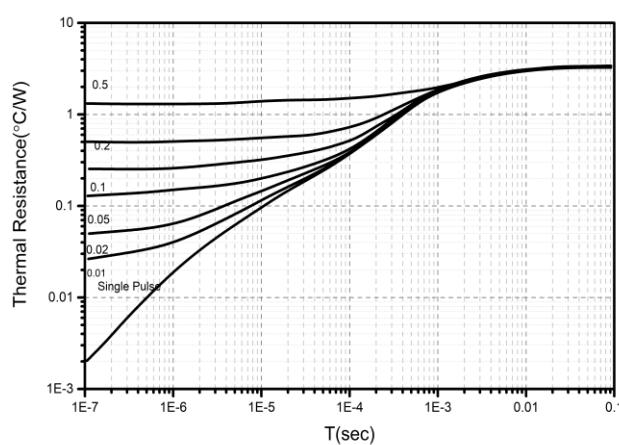

N-Channel Enhancement Mode MOSFET

TO-220F Package Outline Data

