

## N-Channel Enhancement Mode MOSFET

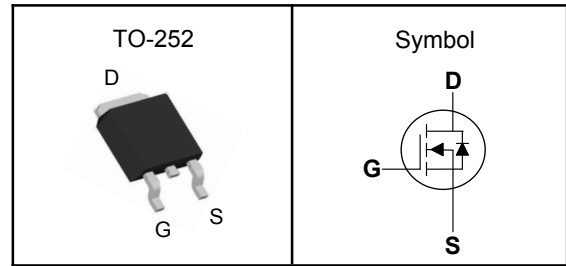
### Features

- Fast switching speed
- Reliable and Rugged
- ROHS Compliant
- 100% UIS and Rg Tested

### Applications

- Power Management in Desktop Computer
- DC/DC Converters

### Pin Description



$V_{DSS}$	650	V
$R_{DS(ON)-Typ}$	1100	m $\Omega$
$I_D$	7	A

### Absolute Maximum Ratings ( $T_C=25^\circ\text{C}$ , Unless Otherwise Noted)

Symbol	Parameter	N-Channel	Unit
$V_{DSS}$	Drain-Source Voltage	650	V
$V_{GSS}$	Gate-Source Voltage	$\pm 30$	V
$T_J$	Maximum Junction Temperature	-55 to 150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
$E_{AS}$	Single Pulse Avalanche Energy <sup>3</sup>	230	mJ
$I_{DM}^{①}$	Pulse Drain Current Tested	28	A
$I_D$	Continuous Drain Current	7	A
$P_D$	Maximum Power Dissipation	97	W

### Thermal Characteristics

Symbol	Parameter	Rating	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient <sup>1</sup> (Max)	60	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance Junction-Case <sup>1</sup>	1.29	$^\circ\text{C}/\text{W}$

Note ① : Max. current is limited by bonding wire.

Note ② : UIS tested and pulse width are limited by maximum junction temperature 150 $^\circ\text{C}$ .

Note ③ : Surface Mounted on 1in<sup>2</sup> FR-4 board with 1oz.



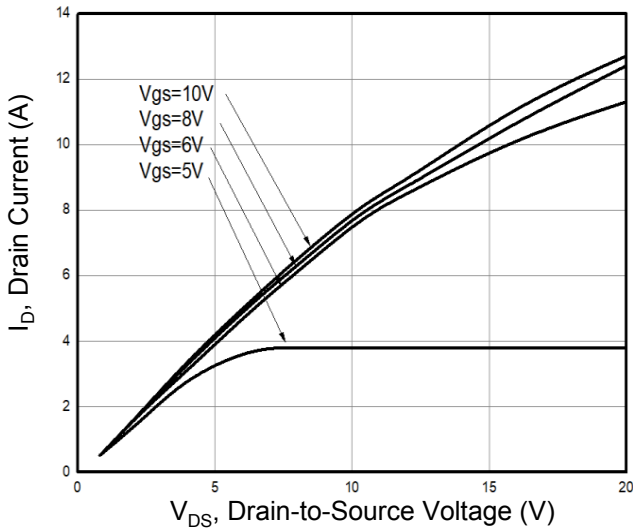
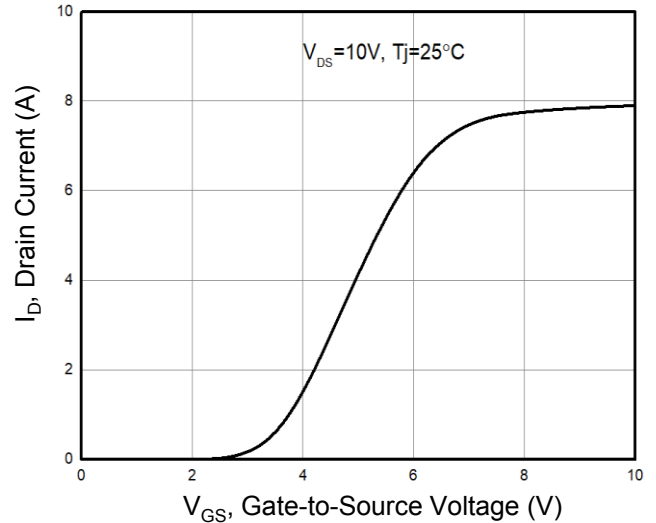
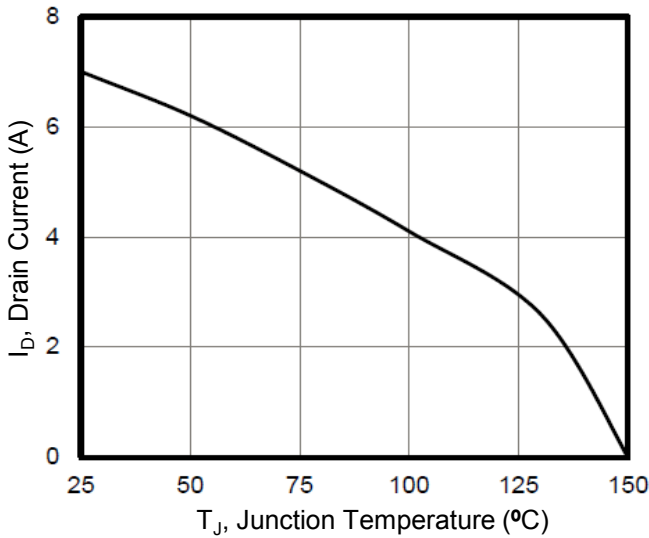
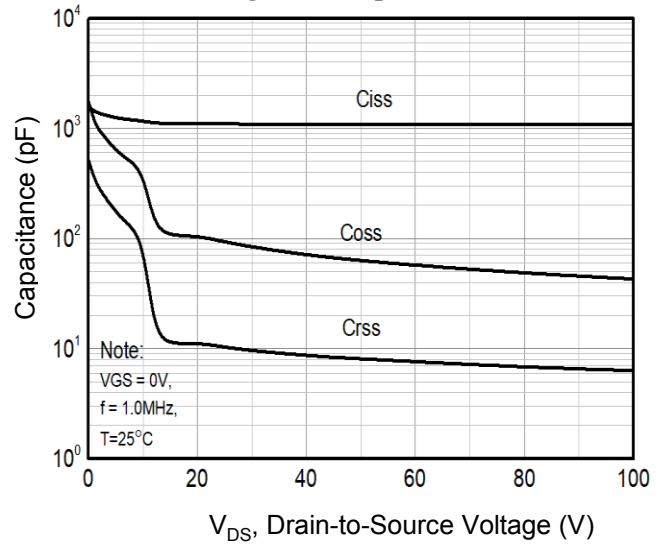
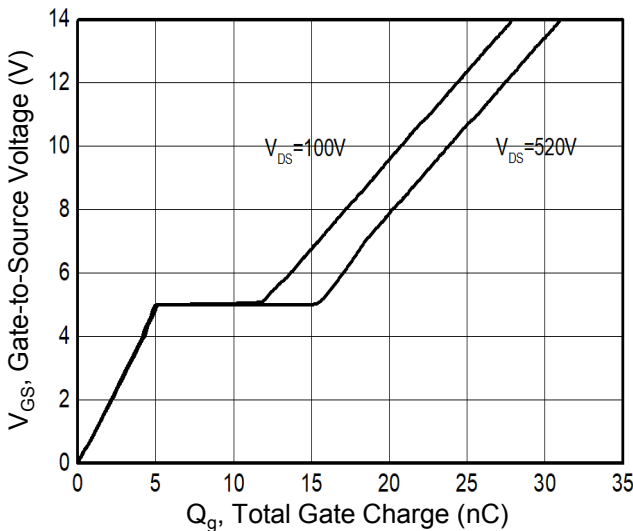
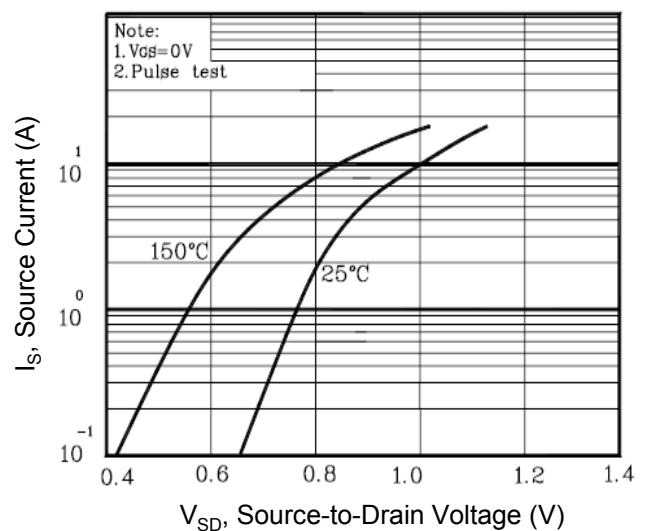
**N-Channel Enhancement Mode MOSFET**

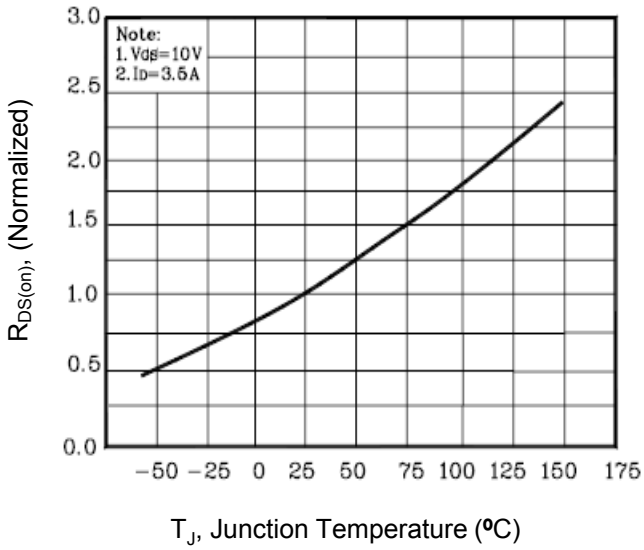
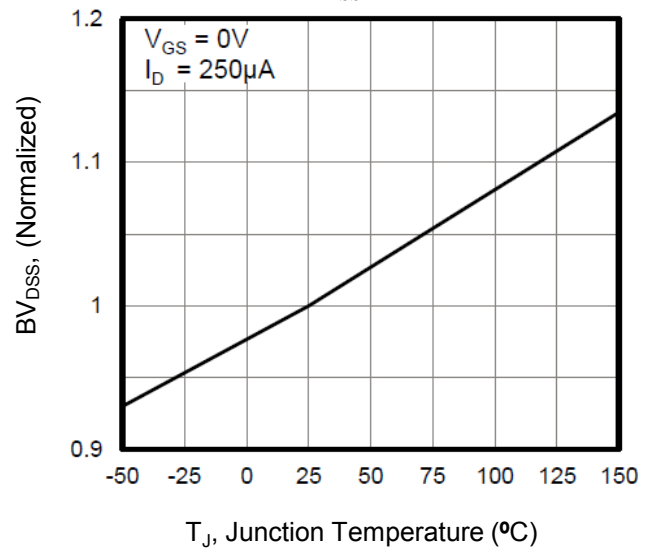
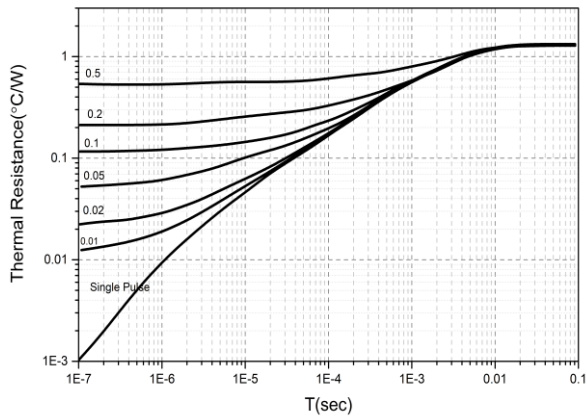
**Electrical Characteristics** ( $T_J=25^{\circ}\text{C}$ , Unless Otherwise Noted)

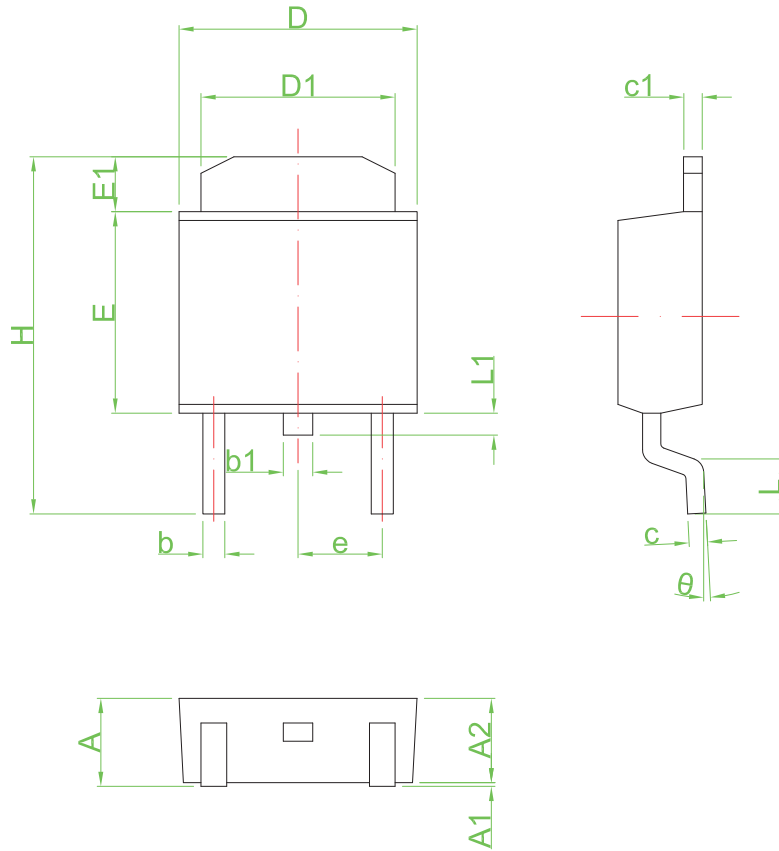
Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
<b>Static Electrical Characteristics</b>						
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	650	---	---	V
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=650V, V_{GS}=0V$	---	---	1	$\mu A$
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	2	---	4	V
$I_{GSS}$	Gate Leakage Current	$V_{GS}=\pm 30V, V_{DS}=0V$	---	---	$\pm 100$	nA
$R_{DS(ON)}$	Drain-Source On-state Resistance	$V_{GS}=10V, I_D=3.5A$	---	1100	1300	$m\Omega$
<b>Dynamic Characteristics</b> <sup>⑤</sup>						
$C_{iss}$	Input Capacitance	$V_{GS}=0V,$ $V_{DS}=25V,$ Freq.=1MHz	---	1098	---	pF
$C_{oss}$	Output Capacitance		---	93	---	
$C_{rss}$	Reverse Transfer Capacitance		---	11	---	
$T_{d(on)}$	Turn-on Delay Time	$V_{DD}=325V, R_G=25\Omega,$ $I_D=7A$	---	29	---	nS
$T_r$	Turn-on Rise Time		---	48	---	
$T_{d(off)}$	Turn-off Delay Time		---	39	---	
$T_f$	Turn-off Fall Time		---	33	---	
$Q_g$	Total Gate Charge	$V_{DD}=400V, V_{GS}=10V,$ $I_D=7A$	---	20	---	nC
$Q_{gs}$	Gate-Source Charge		---	4	---	
$Q_{gd}$	Gate-Drain Charge		---	7	---	
<b>Source-Drain Characteristics</b> ( $T_J=25^{\circ}\text{C}$ )						
$V_{SD}$	Diode Forward Voltage <sub>2</sub>	$V_{GS}=0V, I_S=7A, T_J=25^{\circ}\text{C}$	---	---	1.4	V
$t_{rr}$	Reverse Recovery Time	$V_R=400V, I_S=7A,$ $di/dt=100A/\mu s, T_J=25^{\circ}\text{C}$	---	365	---	nS
$Q_{rr}$	Reverse Recovery Charge		---	3.4	---	nC

Note ④ : Pulse test (pulse width $\leq$ 300 $\mu$ s, duty cycle $\leq$ 2%).

Note ⑤ : Guaranteed by design, not subject to production testing.

**N-Channel Enhancement Mode MOSFET**
**Typical Characteristics**
**Figure 1. Output Characteristics**

**Figure 2. Transfer Characteristics**

**Figure 3. Drain Current vs. Temperature**

**Figure 4. Capacitance**

**Figure 5. Gate Charge**

**Figure 6. Body Diode Forward Voltage**


**N-Channel Enhancement Mode MOSFET**
**Figure 7. On-Resistance vs. Temperature**

**Figure 8.  $BV_{DSS}$  vs. Temperature**

**Figure 9. Transient Thermal Impedance  
(TO-252)**


**N-Channel Enhancement Mode MOSFET**
**TO-252 Package Outline Dimensions**


Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	2.25	2.65	0.089	0.104
A1	0.00	0.15	0.000	0.006
A2	2.20	2.40	0.087	0.094
b	0.50	0.70	0.020	0.028
b1	0.70	0.90	0.028	0.035
c	0.46	0.66	0.018	0.026
c1	0.46	0.66	0.018	0.026
D	6.30	6.70	0.248	0.264
D1	5.20	5.40	0.205	0.213
E	5.30	5.70	0.209	0.224
E1	1.40	1.60	0.055	0.063
H	9.40	9.90	0.370	0.390
e	2.30 TYP		0.09 TYP	
L	1.40	1.77	0.055	0.070
L1	0.50	0.70	0.020	0.028
θ	0°	8°	0°	8°